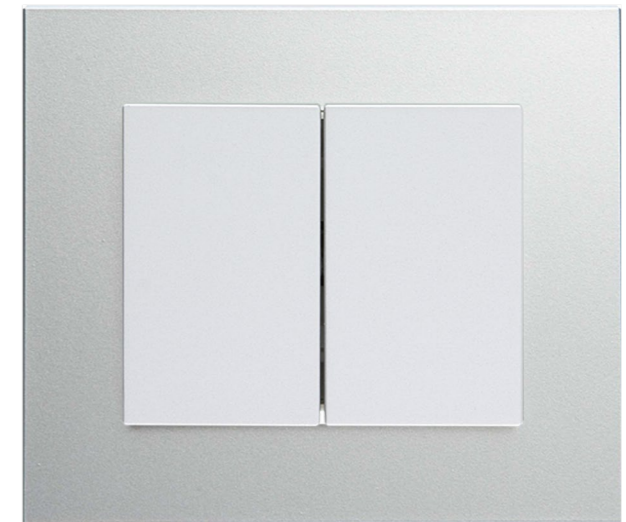




decente

pure lines



Clean lines and timeless design, together with noble natural materials, characterize the DECENTE series. Wider, luxurious looking glass, wooden, metal or plexi-glass frames beautifully complement a variety of modern interior styles. Frames of minimal thickness provide an elegant feel. Covers are made of high quality, UV-stable plastic.

timeless design

Various materials in different shades of glass, wood, metal, and plexiglass allow perfect coordination with the interior according to your preferences.



wooden walnut MDF frame
/ cover white



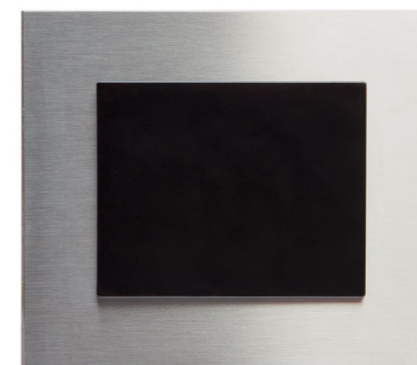
wooden mahogany MDF frame
/ cover titanium



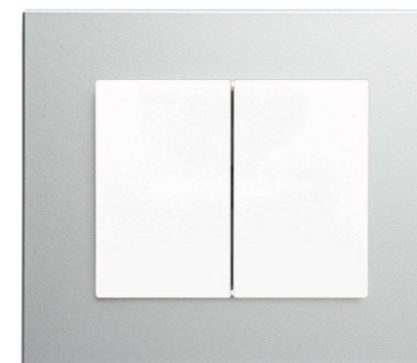
wooden oak MDF frame
/ cover white



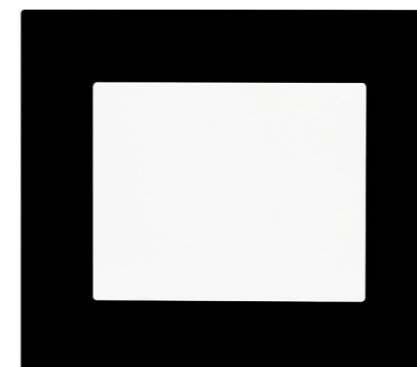
glass milk white frame
/ cover white



stainless steel frame
/ cover black matt



aluminium frame
/ cover white











plexiglass black frame
/ cover white



Try our online designer tool
www.domovnivypinace.cz/en











frame multiplicities decente

	DSD 00-00000- 11XX	dimensions (h×w) 95×110 mm
	DSD 00-00000- 12XX	dimensions (h×w) 95×181 mm
	DSD 00-00000- 13XX	dimensions (h×w) 95×252 mm
	DSD 00-00000- 14XX	dimensions (h×w) 95×323 mm
	DSD 00-00000- 21XX	dimensions (h×w) 166×110 mm
	DSD 00-00000- 31XX	dimensions (h×w) 237×110 mm
	DSD 00-00000- 41XX	dimensions (h×w) 308×110 mm
	DSD 00-00000- 82XX	dimensions (h×w) 130×110 mm



Please note that horizontal and vertical multiple frames have different design.

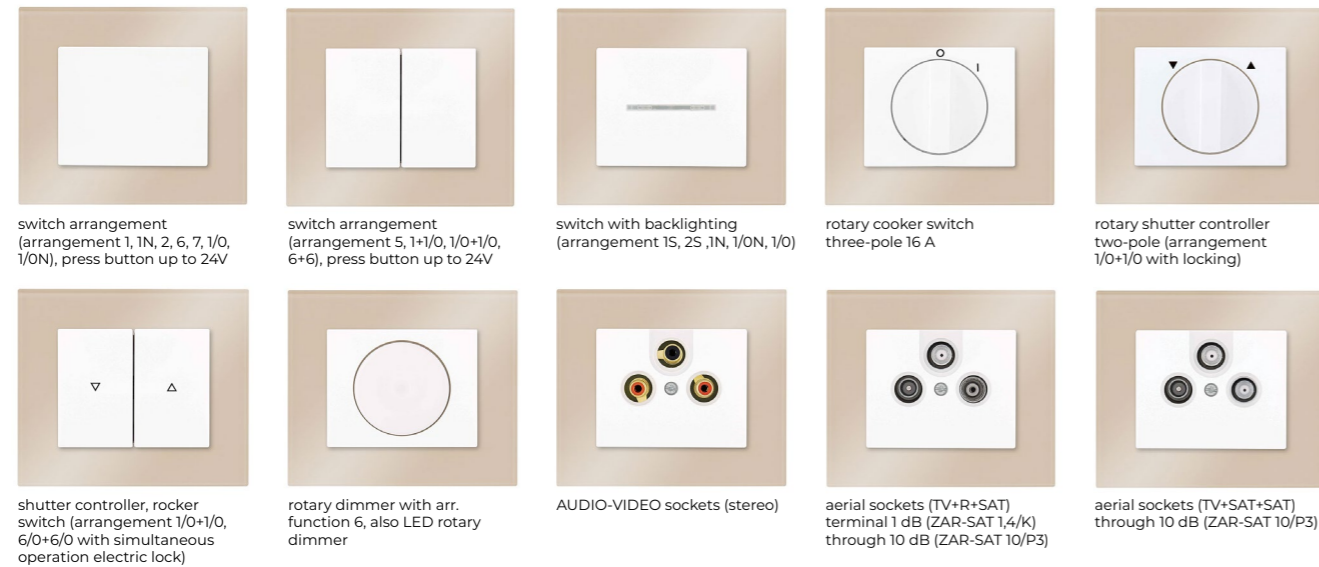
decente mini

	DSI 00-00000- 118X	dimensions (h×w) 90×102 mm
	DSI 00-00000- 128X	dimensions (h×w) 90×174 mm
	DSI 00-00000- 138X	dimensions (h×w) 90×245 mm
	DSI 00-00000- 148X	dimensions (h×w) 90×316 mm
	DSI 00-00000- 218X	dimensions (h×w) 162×102 mm
	DSI 00-00000- 318X	dimensions (h×w) 233×102 mm
	DSI 00-00000- 418X	dimensions (h×w) 304×102 mm
	DSI 00-00000- 828X	dimensions (h×w) 125×102 mm

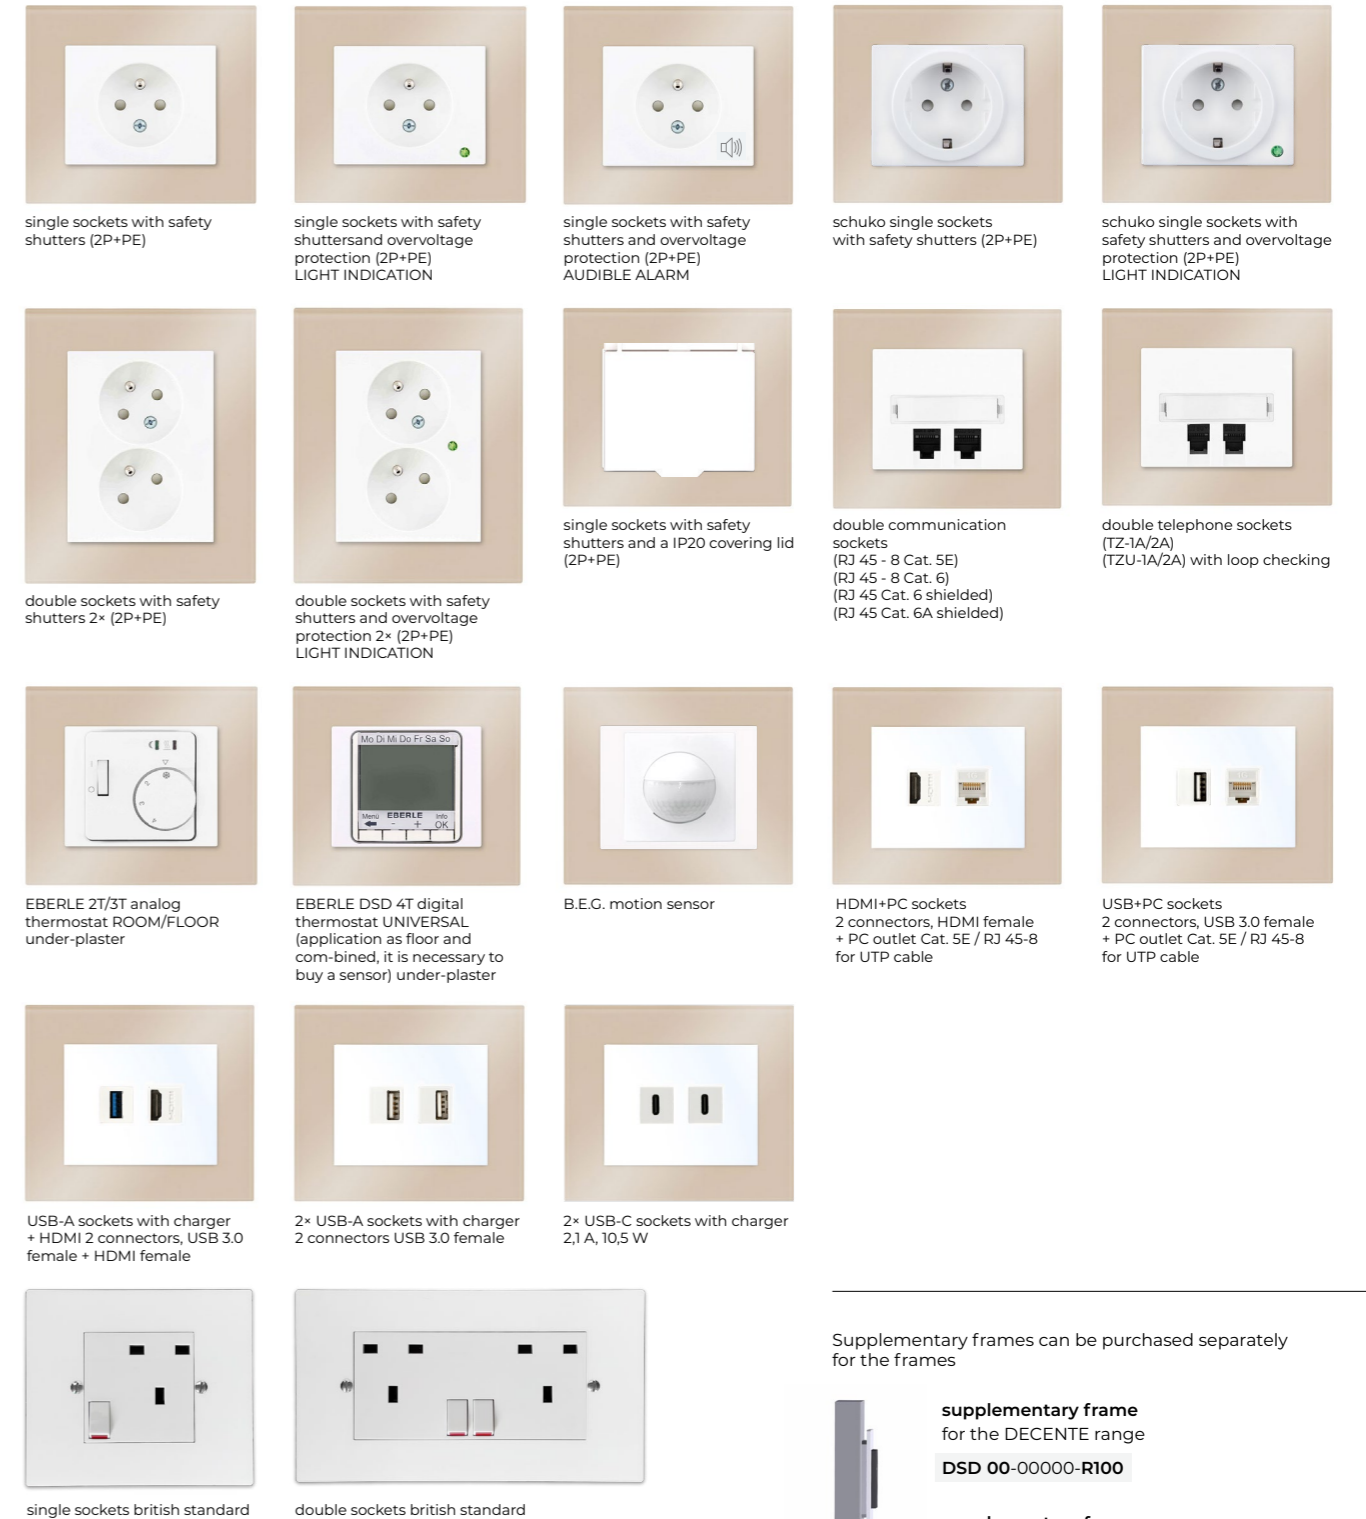


Decente mini is offered only in plexi and plexiglass.

sets



sets



Connectors for keystone sockets can also be supplied in black colour.

Supplementary frames can be purchased separately for the frames



supplementary frame
for the DECENTE range

DSD 00-00000-R100

supplementary frame
for the DECENTE Mini range

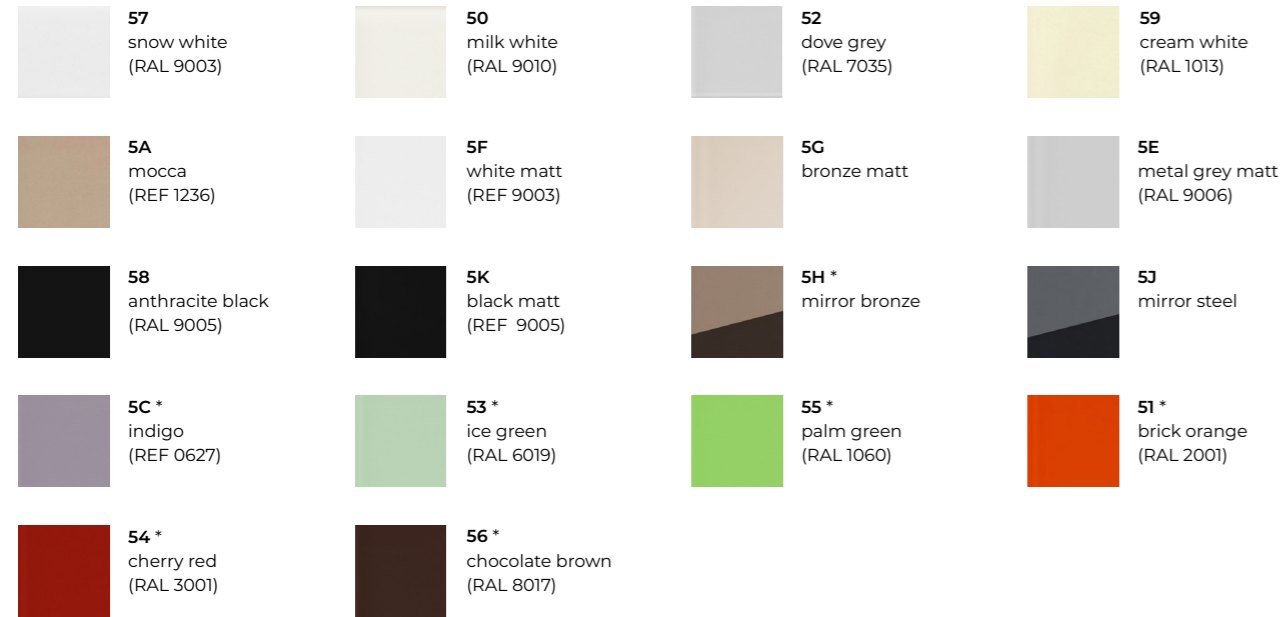
DSI 00-00000-R100



Supplementary frames are installed between the switch frame and the wall and are intended for DECENTE and DECENTE Mini frames.

frames

glass



wood **




metal



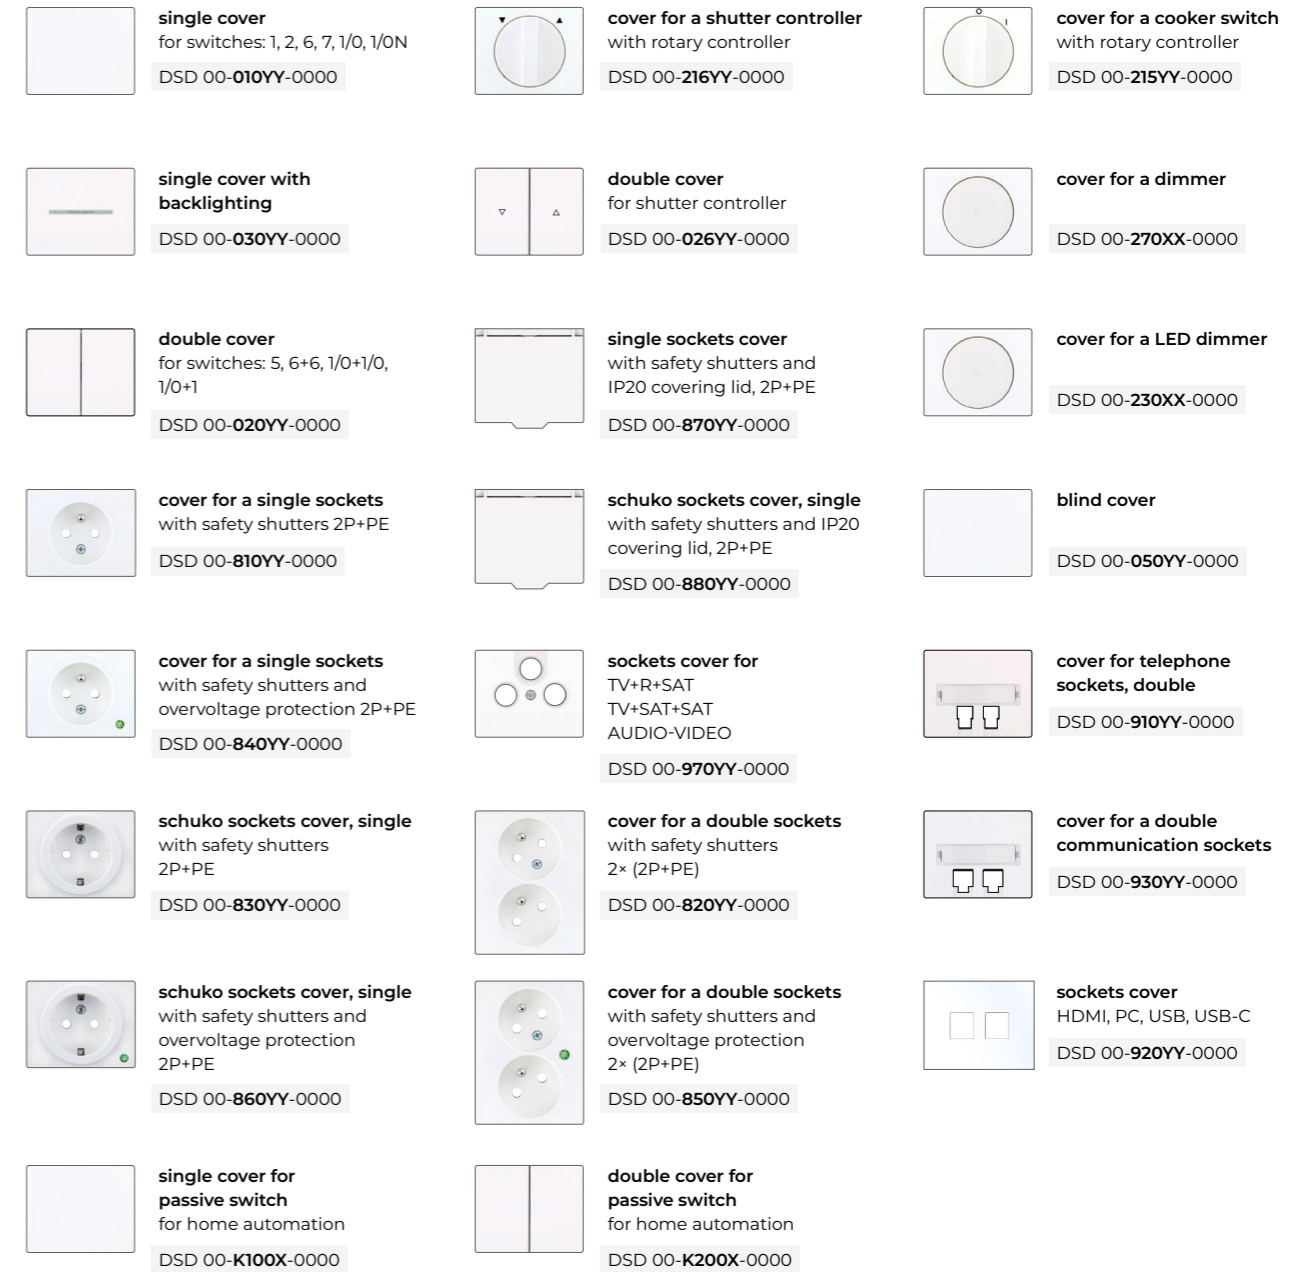
plexi



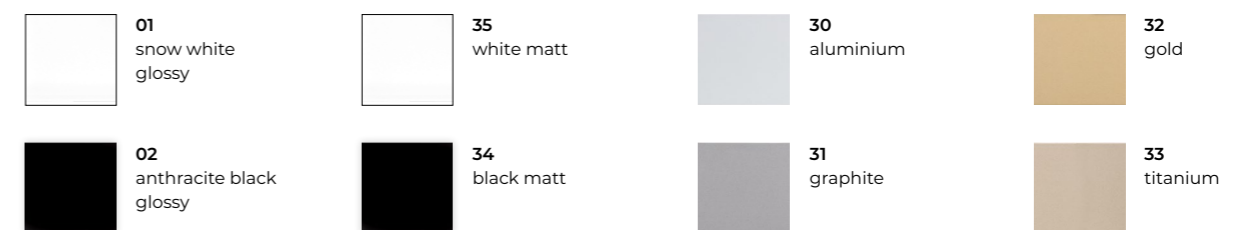
plexiglass



covers



cover colours



* Until stocks are sold out
** Please note that due to uniqueness of natural wooden materials used for DECENTE frames, these may not always be the same, their colour tone and pattern may vary. Colour tones may differ slightly from reality.





ORDER CODE:
DSD 00-00000-XXXX





ORDER CODE:
DSD 00-000YY-0000


fittings


 **fitting, arrangement 1**
singlepole switch
10 AX, 250 V AC
DSD 01-00000-0000


 **fitting, arrangement 1N**
singlepole switch with a zero terminal
10 AX, 250 V AC
DSD 12-00000-0000


 **fitting, arrangement 2**
twopole switch
10 AX, 250 V AC
DSD 02-00000-0000


 **fitting, arrangement 5**
serial change-over switch
10 AX, 250 V AC
DSD 05-00000-0000


 **fitting, arrangement 6**
ac change-over switch
10 AX, 250 V AC
DSD 06-00000-0000


 **fitting, arrangement 6+6 (6+1)**
ac change-over switch,
double 10 AX, 250 V AC
DSD 66-00000-0000


 **fitting, arrangement 7**
crossbar switch
10 AX, 250 V AC
DSD 07-00000-0000


 **fitting, arrangement 1/0**
switching controller
10 AX, 250 V AC
DSD 10-00000-0000

 **fitting, arrangement 1/0+1/0**
switching controller, double
10 AX, 250 V AC
also suitable as shutter switch without locking
DSD 11-00000-0000

 **fitting, arrangement 1/0N**
switching controller with a zero terminal
10 AX, 250 V AC
DSD 13-00000-0000

 **fitting, arrangement 1/0+1**
switching controller
+ singlepole switch
10 AX, 250 V AC
DSD 14-00000-0000

 **fitting, arrangement 1+1**
singlepole switch
+ singlepole switch
10 AX, 250 V AC
DSD 15-00000-0000

 **fitting, arrangement 6/0+6/0**
shutter switch with locking
10 AX, 250 V AC
DSD 16-00000-0000

 **fitting, arrangement 1/0,
press button, up to 24 V**
50 mA, 24 V DC
DSD 17-00000-0000

 **fitting, arrangement 1/0 + 1/0,
press button, up to 24 V**
50 mA, 24 V DC
DSD 18-00000-0000

 **passive switch**
for intelligent systems
50 mA, 12 V DC
DSD KC-00000-0000

 **passive switch**
for intelligent systems
with KNX module
21-30 V DC
DSD KX-00000-0000

 **AUDIO-VIDEO sockets**
stereo (2+1)
DSD 72-00000-0000

 **fitting for cooker switch, rotary**
threepole
16 A, 400 V AC
recommended min. depth of installation box - 60 mm
DSD 21-00000-0000

 **fitting for shutter controller**
rotary (with locking)
10 A, 230 V AC
recommended min. depth of installation box - 60 mm
DSD 22-00000-0000

 **dimmer fitting with
arrangement 6**
230 V AC, load
40-250 W
DSD 27-00000-0000

 **LED dimmer fitting**
230 V AC, load 0-100 W LED,
10-250 W incandescent
light bulb
DSD 23-00000-0000


 **telephone sockets**
double
TZ-1A2A, TZU
DSD 91-00000-0000


 **communication sockets**
Cat. 5E / Cat. 6, double
PC outlet, black connectors
2x RJ 45-8 for UTP cable
DSD 93-00000-0000 Cat. 5
DSD 98-00000-0000 Cat. 6


 **communication sockets**
Cat. 6 / Cat. 6A, double
PC outlet, black connectors
2x RJ 45 shielded for STP cable
DSD 74-00000-0000 Cat. 6
DSD 75-00000-0000 Cat. 6A


 **HDMI+PC socket**
2 connectors: HDMI female
+ PC outlet Cat. 5E for utp cable
DSD 92-00000-0000


 **USB-A+PC socket**
2 connectors: USB 3.0 female
+ PC outlet Cat. 5E for utp cable
DSD 94-00000-0000


 **USB-A sockets with charger + HDMI**
2 connectors: USB 3.0 female
+ HDMI female, white connectors
(1000 mA)
DSD 95-00000-0000


 **2x USB-A sockets with charger**
2 connectors: USB 3.0 female
2 connectors, 5 V DC / 1000 mA
DSD 96-00000-0000


 **2x USB-C sockets with charger**
2 connectors: USB-C charger
2,1 A, 10,5 W
DSD 9C-00000-0000


 **support frame for HDMI,
USB-A, USB-C, PC connectors**
DSD 35-00000-0000


 **sockets TV+R+SAT**
terminal, attenuation 1 dB, 300 mA, 24 V DC
for coaxial cables of diameter 4.5-8.3 mm
type designation on the product: ZAR-SAT 1.4/K
DSD 97-00000-0000


 **sockets TV+R+SAT**
through, attenuation 10 dB, 300 mA, 24 V DC
for coaxial cables of diameter 4.5-8.3 mm
type designation on the product: ZAR-SAT 10/P3
DSD 99-00000-0000


 **sockets TV+SAT+SAT**
through, attenuation 10 dB, 300 mA, 24 V DC
for coaxial cables of diameter 4.5-8.3 mm
type designation on the product: ZAR-SAT 10/P3
DSD 76-00000-0000


 **sockets 2P+PE**
single socket with safety shutters and IP 20
covering lid, plastic base 16 A, 250 V AC
DSD 89-870YY-0000


 **2P+PE sockets**
single, with safety shutters, plastic base
16 A, 250 V AC
DSD 89-810YY-0000


 **2P+PE with OP sockets**
single, with safety shutters and overvoltage
protection (LIGHT INDICATION)
16 A, 250 V AC
DSD 84-840YY-0000


 **2P+PE with OP sockets**
single, with safety shutters and overvoltage
protection (AUDIBLE ALARM)
16 A, 250 V AC
DSD 80-810YY-0000

 **2P+PE schuko sockets**
single, with safety shutters
16 A, 250 V AC
DSD S2-830YY-0000









 **2P+PE with OP schuko sockets**
single, with safety shutters and overvoltage
protection (LIGHT INDICATION)
16 A, 250 V AC
DSD S3-860YY-0000


 **2x (2P+PE) sockets**
double, with safety shutters
16 A, 250 V AC
DSD 82-820YY-0000

 **2x (2P+PE) OP sockets**
double, with safety shutters and with
overvoltage protection (LIGHT INDICATION)
16 A, 250 V AC I max 4.5 kA, Up < 1.2 kV
DSD 85-850YY-0000

 **sockets schuko 2P+PE**
single socket with safety shutters and IP 20
covering lid, plastic base 16 A, 250 V AC
DSD S2-880YY-0000

sockets cover colours

	01 snow white glossy		35 white matt		30 aluminium		32 gold
	02 anthracite black glossy		34 black matt		31 graphite		33 titanium

 Power sockets always come in set with a cover of your choice.

decente

hotel systems

*comfortable for guests, simple
and effective for staff*

The ACS-line Reception Hotel System by Estelar Company is designed to secure all activities related to running a hotel or pension. The system includes wall-mounted card readers and energy savers in Decente design available in all standard colours and materials which can match other switches and sockets in Decente design. One hotel card will allow room access, lift control, access to authorized areas (parking, wellness, etc.), payments in hotel bars and restaurants, use of other services (bike rental, ski passes, etc.).



ESTELAR
ELEKTRONICKE SYSTÉMY

card reader

Card reader (built-in card scanner) is a device for reading cards and controlling individual access according to permission. Typical use is e.g. opening of hotel entrance door, hotel room access, opening of wellness door within allowed time.



ORDER CODE:
DSD 00-CK0YY-H1XX

energy saver

The Energy Saver is a device that activates a function when a card is inserted and maintains it while the card remains inside. The device is equipped with a card reader and responds only to authorized cards, so it is not possible to replace the card with for example sturdy paper. Typical use is in hotel rooms, where wiring is active only in the presence of a guest, or for light control in meeting rooms, depending on occupancy. Connection of heating sensors for controlling room temperature is also available.



The producer of hotel card readers and hotel systems is ESTELAR, s. r. o.
More info to be found at www.acsline.cz.



Card readers are offered in DECENTE design with white, black or metallic cover.
Frame can be chosen from glass, wood, metal, plexi or plexiglass collection.



ORDER CODE:
DSD 00-HK0YY-H1XX